

Geckolighting® 25w LED Adjustable Downlight




Geckolighting® LED 25w Adjustable Downlight.

Complete LED downlight unit with fully adjustable fitting for precise light placement. These high power LED downlights are ideal replacement units for existing commercial products. Comes complete with dedicated LED driver.

Colour options of;
Cool white – 6000K
Warm white – 3000K



Model Number	22-DLA25CWD (6000K) 22-DLA25WWD (3000K)
LED power:	25W
Input Voltage	AC85-265V
Frequency Range	50/60Hz
Initial luminous flux:	2280lm
Power Factor(PF)	>0.96
Driver:	Dimmable driver
LED source:	Epistar COB LED
Luminous efficiency:	90-100lm/w
Light efficiency:	>90%
Operating temperature:	-30°C ~ +55°C
Color Temperature	CW - Cool white: 6,000K WW - Warm white: 3,000K
Color Index(CRI)	Ra>80
Beam Angle:	100°
Light Body& Lampshade	Aluminum Alloy and PC lens
Working Life	50,000 Hrs
IP Rating:	IP40
Cutout size:	180mm
Dimensions:	Diameter: 185mm x height: 170mm
Net Weight	1.8Kg

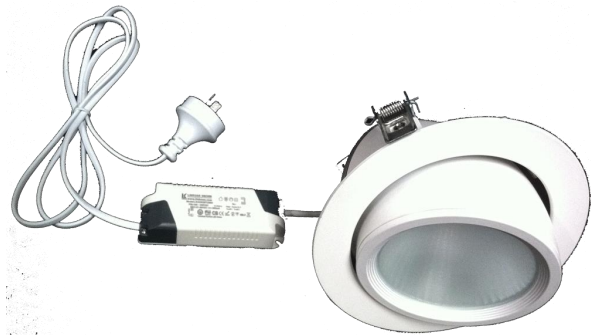

Geckolighting
Phone: (08) 9371 2652
Fax: (08) 9371 2444
sales@geckolighting.com.au



www.geckolighting.com.au



geckolighting®
 LED