

# Geckolighting® LED Light Bars



## Geckolighting® LED Light Bars.

Using 5050SMD LEDs as light source giving super luminous flux, large viewing angle, even lighting and low light attenuation.

Three standard light bar sizes 0.5m, 1.0m & 1.5m Available in a variety of colours including full RGB colour change.

### Features:

- Energy saving
- Environmentally friendly
- Long life span
- Shock resistant
- High light output
- Can be cut every 50mm (12V) or 100mm (24V).

### Applications:


- Shop/Display
- Refrigeration/Freezer
- Warehouse/racking
- Cabinets
- Vehicle/truck
- Gardens/water features
- Camping/Caravan lighting



Model Number: 40-LB	0.5m	1.0m	1.5m
LED power:	7.2w	14.4w	21.7w
LED (SMD5050) Qty:	30	60	90
Working Voltage:	DC12V or DC24V		
Driving method:	Constant Voltage		
Operating temperature:	-40°C ~ +60°C		
Available colour options;	CW /WW/R/G/B/Y/RGB/Pink		
Beam Angle:	>140°		
IP Rating:	IP65		
Dimensions (mm):	500 x 19 x 11	1000 x 19 x 11	1500 x 19 x 11

Luminous Flux (lm)					
Red	Green	Blue	Yellow	WW	CW
385	540	385	385	800	900

Wavelength Scope (nm/K)					
Red	Green	Blue	Yellow	WW	CW
619-635	512-528	463-475	584-595	3000-3200	5500-6500

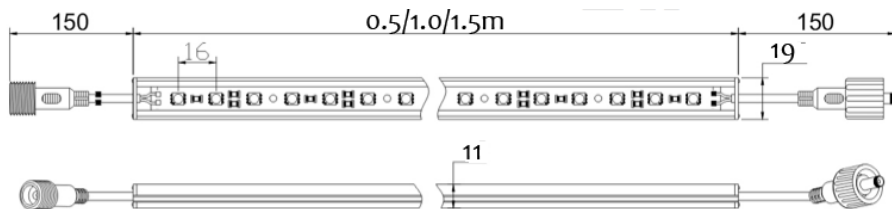

Range of Light bar accessories



Geckolighting

Phone: (08) 9371 2652

Fax: (08) 9371 2444

sales@geckolighting.com.au



www.geckolighting.com.au

