

# Geckolighting® LED Canopy light




## Geckolighting® LED 100w/150w Canopy Light

Slim line surface mount IP65 Canopy Light. High output LED lighting suitable for hostile environments. IP65




Model Number	60-CL100	60-CL150
LED power:	100W	150W
Input Voltage	100-277VAC	
Frequency Range	50/60Hz	
Luminous flux:	11195	16691
Power Factor(PF)	>0.90	
Operating temperature:	-20°C ~ +45°C	
Color Temperature	6000K	
Color Index(CRI)	Ra>70	
Beam angle:	110°	
Light Body& Lampshade	Diecast Aluminium cover & Beaded Lens	
IP Rating:	IP65	
Driver:	Meanwell HLG-150H-48A	
Dimensions – Width x Height x Depth:	380mmx380mmx78mm	
Net Weight	6kg	6kg

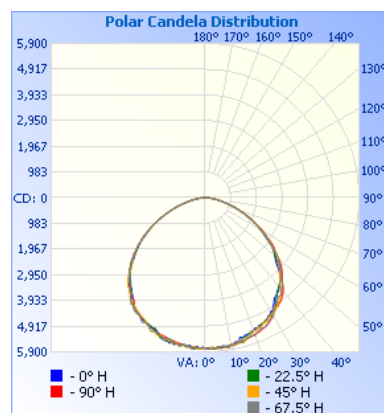

### 150w Data Shown

Distance	Illuminance at a Distance	
	Center Beam LUX	Beam Width
1.33M	3,241 LUX	3.98 M 4.05 M
2.67M	808 LUX	7.97 M 8.12 M
4.00M	360 LUX	11.95 M 12.17 M
5.33M	202 LUX	15.94 M 16.24 M
6.67M	129 LUX	19.92 M 20.29 M
8.00M	89.8 LUX	23.91 M 24.35 M

■ Vert. Spread: 112.4°  
■ Horiz. Spread: 113.4°

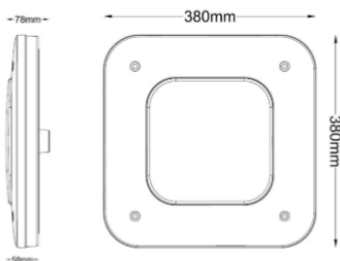

Geckolighting  
 Phone: (08) 9248 6205  
 Fax: (08) 9248 3501  
 sales@geckolighting.com.au



www.geckolighting.com.au

