

## **Geckolighting® LED tube Installation instructions.**

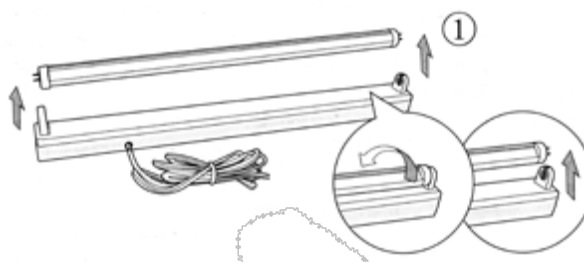
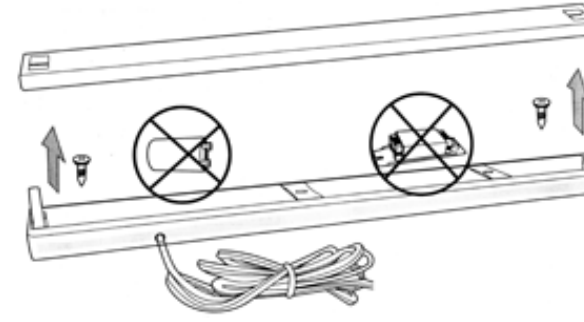
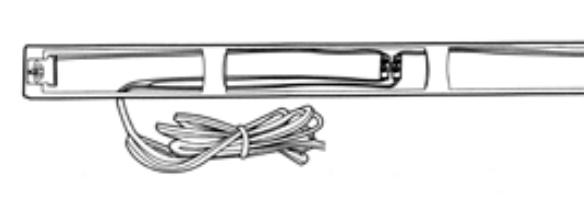
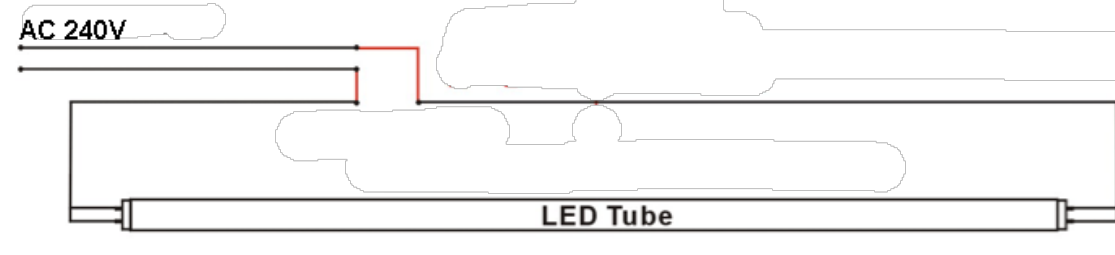
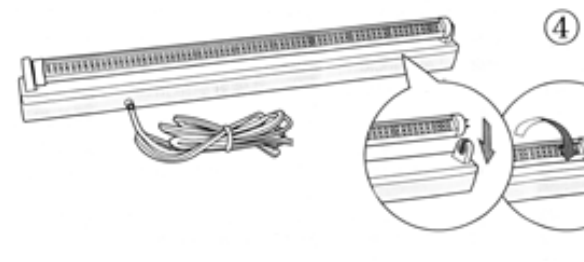
**Note: Read instructions carefully prior to installing your Geckolighting LED tubes.**

Geckolighting LED tubes do not require a ballast, capacitor or starter. If you are installing Gecko LED tubes into an existing light fixture, these items must be removed or bypassed to achieve maximum energy savings.

\* (This work must be done by licenced electrician.)

**DO NOT** use Gecko LED tubes in fittings with electronic ballasts until modified as per details below.

**NOTE: Place supplied info sticker on modified fitting (insert electricians registration number and date on sticker)**

	<ul style="list-style-type: none"><li>• <b>TURN OFF POWER</b></li><li>• Remove fluoro tube from fitting</li></ul>
	<ul style="list-style-type: none"><li>• Remove fitting cover</li><li>• Remove/bypass ballast, capacitor &amp; starter (if fitted)</li></ul>
	<ul style="list-style-type: none"><li>• Modify wiring - Live to one end and Neutral to other. (See schematic below).</li></ul>
 <p>AC 240V</p> <p>LED Tube</p>	
	<ul style="list-style-type: none"><li>• Replace fitting cover</li><li>• Install new Gecko LED tube</li><li>• Place sticker on fitting</li><li>• Connect to power</li></ul>